




"ALL-FILM" H.V. CAPACITORS DIMENSIONS AND WEIGHT

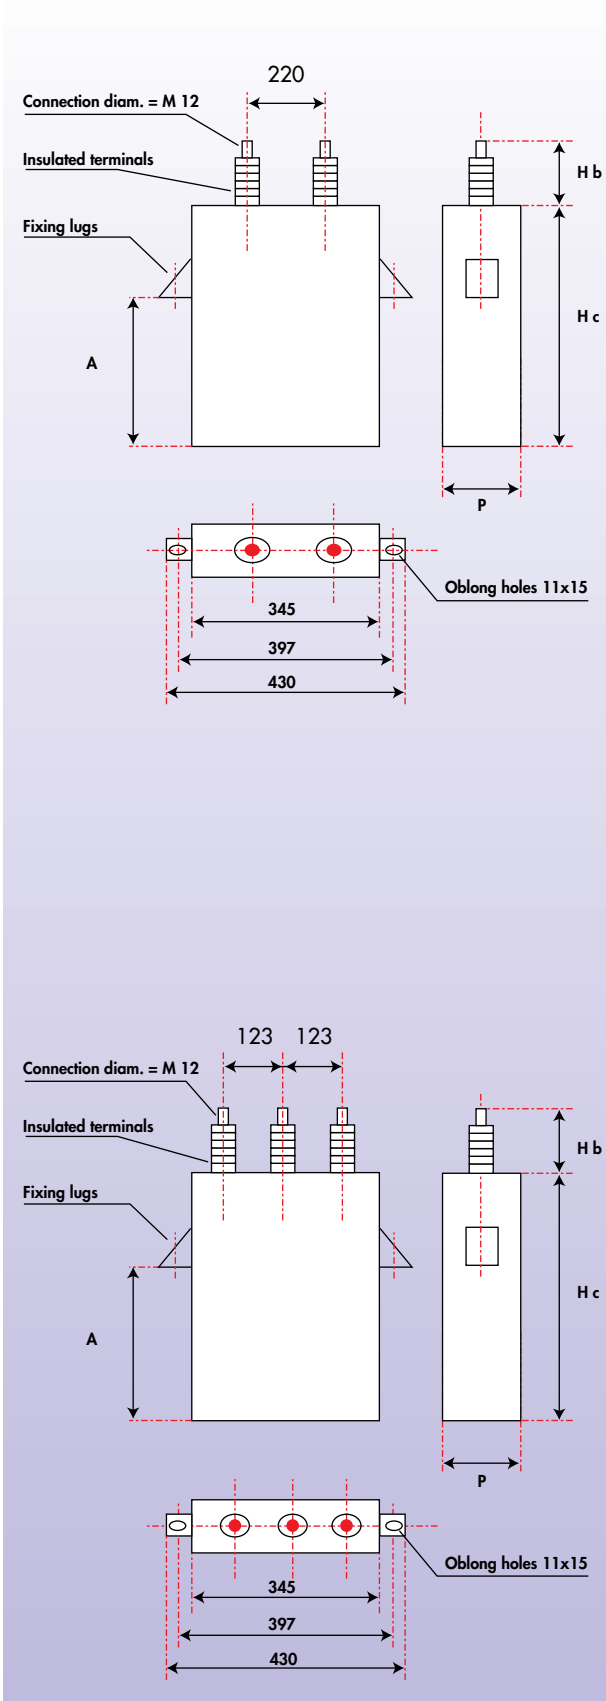

Power (standard) kvar	Dimensions mm			Weight kg	Capacitor connection
	Hc	A	P		
50	190	40	135	17	Three-phase or single-phase
75	250	100	135	21	
100	280	130	135	23	
125	350	200	135	27	
150	370	220	135	30	
175	450	300	135	33	
200	460	310	135	35	
250	460	310	135	42	
300	510	360	175	46	
350	590	440	175	53	
400	650	400	175	60	
450	730	480	175	65	
500	790	540	175	70	
550	880	630	175	76	
600	950	700	175	82	

Note : For specific applications (replacements, etc.), the value A can be adapted to customer requirements.

Hb Indoor type mm	Hb outdoor type mm	Um R.M.S. kV	Capacitor connection	
46	225	2.4	Three-phase	Single-phase
46	225	3.6		
172	225	7.2		
172	225	12		
225	225	17.5		
257	227	24		

Note : The Um R.M.S. voltage to be taken into account is the supply voltage at which the capacitor is connected and not the nominal unit voltage (particularly applies to single-phase capacitors in star or double star connections).