

ALPIMATIC RACK

Part number: R9.RS7240.189



R9 Alpimatic racks are factory connected units for integration in universal cabinets (1000 x 600 mm) in order to build automatic PFC systems.

Contents	Page
1. Technical data	1
2. Description	1
3. Installation instructions	1
4. Dimensions	1

1. Technical data

Range:	ALPIMATIC RACK
Type:	SAH, Extra-Reinforced Class
Nominal power:	72 kVAr
Nominal voltage:	400 V - 50 Hz - Tri
Max permissible voltage:	620 V
Harmonic level:	THDU > 6% & THDI > 40% SH/ST > 50%
Loss factor:	6 W / kVAr
Temperature class:	-10°C / +45°C Average over 24H: +40°C Annual average: +35°C
Weight:	80 kg
Dimensions (W x D x H mm) :	900 x 558 x 400
Type :	Indoor
Storage :	-30°C / +60°C
Environment :	Dry Dust-free Non-corrosive Vibration-free
Standard:	IEC 61439-1 and 2

- 1 Protection by 3 HRC fuses, gG type.
- 1 set of modular copper busbars with junction bars for connecting several racks in parallel.
- 1 steel frame on which the components are assembled and wired.

3. Installation instructions

Wait for 3 minutes before reconnecting the capacitor in compliance with mandatory discharging time.

The capacitor bank must be protected against overloads and short circuits with a thermal-magnetic circuit breaker.

External environment for the capacitor bank:

- Dry and dust free
- Non-corrosive
- Maximum temperature: +40°C
- Average over 24 hours: +35°C
- Annual average: +25°C

A minimum clearance distance of 200 mm must be respected against any obstacle (wall, distribution board) to insure good ventilation.


For more details on the commissioning and maintenance, refer to installation instructions.

2. Description

This rack includes:

- 1 ALPIVAR² capacitor:
 - Totally dry Unit (without oil impregnation)
 - Double insulation or class II
 - Electrical protection by internal self-healing film, electrical fuse and disconnection device in case of overpressure
 - With discharge resistors (discharging time 3 minutes)
 - Complies with international standard (IEC 60831-1 & 2)
- 1 detuned reactor, three-phase, extra-reinforced class:
 - Tuning frequency = 189 Hz
 - Blocking factor p% = 7%
 - Thermal protection by temperature probe
- 1 electromechanical contactor suitable for capacitive currents (coil 400 Vac).

4. Dimensions

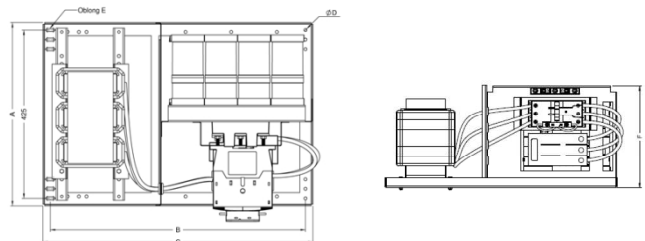

A	B	C	D	E	F
558	865	900	8,2	21 x 8,2 mm	400